

# 30G & 60G series


## TECHNICAL DATASHEET

PRODUCT DETAILS	30G**	60G**
Filter Media	Inorganic microfibre	
Seals	NBR / FPM (see ordering code)	
Working temperature	- 25 °C - +110 °C	
Fluid compatibility	H, HL, HLP, HVLP, HEES, HFC, HFD (for other fluids, please contact RMF Systems)	
Max. working pressure	4,5 bar ( $\Delta p$ )	
Collapse pressure	10 bar ( $\Delta p$ )	
MATERIALS		
Caps	Nylon	
Internal core	Tinned steel	

FILTRATION EFFICIENCY	
G1	$\beta_4(c) > 1000$
G3	$\beta_5(c) > 1000$
G6	$\beta_7(c) > 1000$
G10	$\beta_{10}(c) > 1000$

QUALITY ASSURANCE	
ISO 3968	$\Delta p$ test
ISO 16889	Multi Pass test

## ORDERING CODE

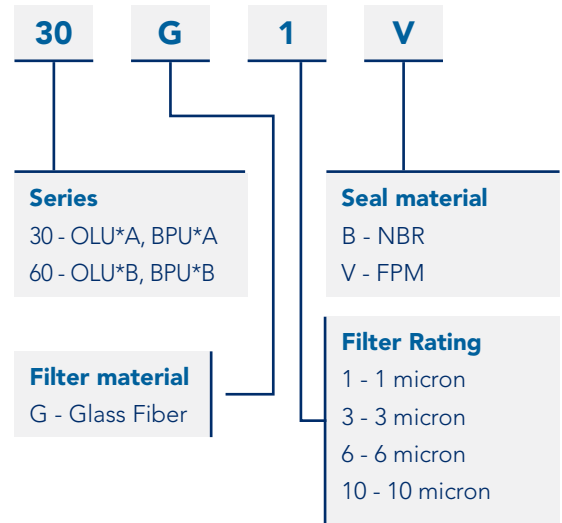

## PRESURE DROP VS FLOW CHART

